





## Roof Opening Panel Module (76.84.46)

### Removal

1. Remove the rear overhead console.
  - ▶ Carefully release the 9 clips.
  - ▶ Disconnect the 2 electrical connectors.

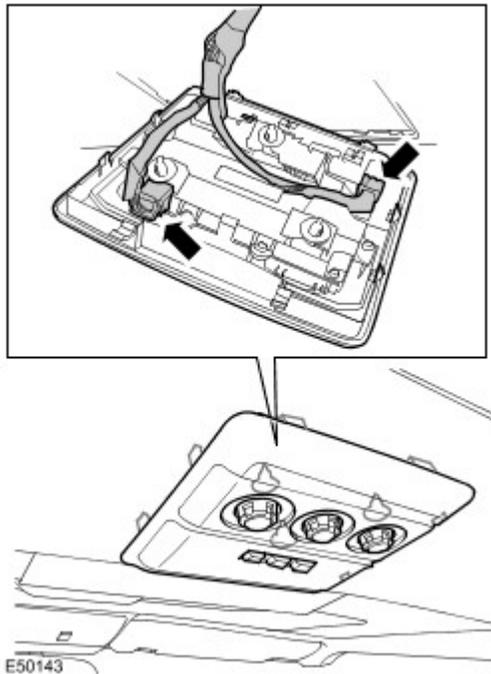

2. Remove the roof opening panel module.
  - ▶ Slide the module to the LH side to release it from the bracket.
  - ▶ Disconnect the 2 electrical connectors.

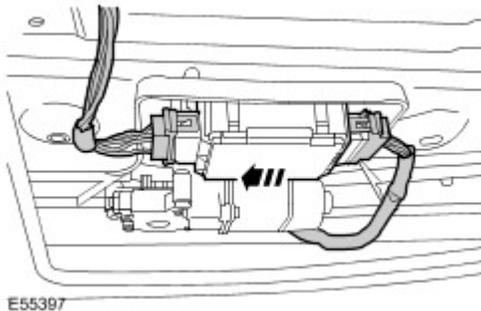

### Installation

1. Install the roof opening panel module.
  - ▶ Connect the electrical connectors.

- ▶ Secure the module to the bracket.
- 2 . Install the rear overhead console.
    - ▶ Connect the electrical connectors.
    - ▶ Carefully secure the clips.
  - 3 . Using T4, configure a new roof opening panel module.
  - 4 . If the battery has been disconnected, the one touch and anti-trap function will become inoperative. Close the roof opening panel and continue to hold the switch for a further 20 seconds to allow the sunroof to complete a full cycle. This will complete the roof opening panels calibration routine and reset these functions.